



PALCLAD™ Pro

Hygienic PVC Wall Lining System



AGRICULTURE CONSTRUCTION ARCHITECTURE



Overview

PALCLAD Pro cladding system is a practical, cost efficient and comprehensive solution for maintaining a clean and safe environment.

Covering large areas is simplified with PALCLAD Pro, which have already helped achieve high resistance to fire and chemicals in hospitals, pharmaceutical plants, restaurants and other locations.

The system features flat opaque PVC panels, manufactured by Palram for 50 years, combine with custom profiles and welding rods in matching colors.

A wide range of colors and surface textures enables design versatility for many purposes. The system's durability ensures many years of service that is unaffected by repetitive cleaning routines.

www.palram.com.au

Main Benefits

- Complete wall cladding solutions
- Profiles or welding rods options
- Creates high sanitation environment
- Withstands repeated cleaning cycles
- Versatile design options through many colors and surfaces
- High impact strength
- High fire rating
- High electrical and thermal insulation
- Non toxic
- PALCLAD™ Pro HYG: Active hygiene



Typical Applications

Healthcare

- Sterile/clean rooms
- Hospitals
- Clinics
- Pharmaceutical plants

Public Facilities

- Schools
- Rest rooms
- Airports
- Public transportation facilities

Food Industry

- Food plants
- Food preparation areas
- Sorting halls
- Storage/refrigeration rooms

Agriculture

- Livestock and dairies
- Egg sorting halls
- Storage rooms
- Refrigeration facilities



Build On.

Product Range

Type	Definition
PALCLAD™ Pro HYG	Active hygiene protection (Silver ions)
PALCLAD™ Pro White*	White panels & welding rods / profiles
PALCLAD™ Pro Colored*	Colored panels & welding rods / profiles








* PALCLAD™ Pro White & Colored are made upon request, subject to minimum quantity.

Dimensions

Thickness	Width x Length	Surface
2 mm	1500 x 3000 mm	Embossed
2.5 mm*	1220 x 3050 mm	Glossy
2.5 mm*	1220 x 2440 mm	Glossy

* 2.5 mm panels are made upon request, subject to minimum quantity.

System and Accessories

Part	Drawing	Package / Size
PVC H Section Profile White Base + Colored Cap		3m
PVC J Section Profile White Base + Colored Cap		3m
PVC Inner Corner Profile		3m
PVC External Corner Profile		3m
Colored PVC Welding Rod		50m Roll
Colored Silicone		Tubes
Glue		

Panel Physical Properties

Property	Method*	Conditions	Units	Value
Density	D-792		g/cm ³	1.4
Heat deflection temperature (H.D.T)	D-648	Load: 1.82MPa	°C	65 - 68
Service Temperature			°C	-10 to +50
Thermal conductivity	C-177		W/m K	0.15
Coefficient of linear thermal expansion	D-696		cm/cm °C	6.7 x 10 ⁻⁵
Rockwell hardness	D-785		R Scale	97R
Tensile strength at yield	D-638	10 mm/min	MPa	50
Tensile strength at break	D-638	10 mm/min	MPa	45
Elongation at yield	D-638	10 mm/min	%	3
Elongation at break	D-638	10 mm/min	%	>80
Tensile modulus of elasticity	D-638	1 mm/min	MPa	2,900
Flexural strength	D-790	1.3 mm/min	MPa	80
Flexural modulus	D-790	1.3 mm/min	MPa	2,700
Impact falling weight	ISO 6603/1 E50	3 mm sheet	J	95


* ASTM except where noted otherwise

Colors

Standard Stock



Special Order*

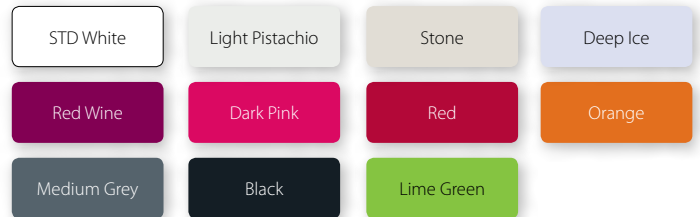

*subject to minimum quantity.

Flammability

PALCLAD Pro is self-extinguishing and complies with the most demanding international fire resistance standards defined in the field of plastics, as shown in the attached table.

Standard	Classification
AS/NZS 3837:1998	Group 3
EN 13501	B, s3, d0
BS 476/7	Class 0
ASTM E 84	Class A

11/2014 The data in this publication supersedes previous releases. For the latest update refer to our website: www.palram.com.au



PALRAM SA/NT
517A Cross keys Road
Cavan SA 5094
Tel: (08) 8262 2288
Fax: (08) 8262 3388
salessa@palram.com

PALRAM NSW/ACT
1 Cox Place
Glendenning NSW 2761
Tel: (02) 9757 3166
Fax: (02) 9756 1008
salesnsw@palram.com

PALRAM QLD
Unit 9C / 380 Bilsen Road
Geebung QLD 4034
Tel: (07) 3172 5581
Fax: (07) 3172 5516
salesqld@palram.com

PALRAM VIC/TAS
34 Buys Court
Derrimut VIC 3030
Tel: (03) 9219 4444
Fax: (03) 9219 4455
salesvic@palram.com

PALRAM WA
74 Christable Way
Landsdale WA 6065
Tel: (08) 9302 4173
Fax: (08) 9302 5287
saleswa@palram.com



In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.

©2013 Palram Industries Ltd. | PALCLAD is a trademark of Palram Industries Ltd.

