



# COMPRESSOR DATA SHEET



## Rotary Compressor: Variable Speed

Date: May 5, 2020

A	Manufacturer:	<b>Quincy Compressor</b>	
B	Base Model:	<b>QOFT-50V</b>	
C	Cooling:	<b>Air-Cooled</b>	
D	Type:	<b>OIL-Free</b>	
E	Stages:	<b>2</b>	
F	Drive Motor Nominal Rating	<b>50</b>	hp
G	Rated Capacity at Full Load Operating Pressure <sup>a</sup>	<b>201.6</b>	acfm <sup>a</sup>
H	Full Load Operating Pressure <sup>b</sup>	<b>125</b>	psig <sup>b</sup>
I	Maximum Full Flow Operating Pressure <sup>c</sup>	<b>125</b>	psig <sup>c</sup>
J	Pressure Ratio <sup>f</sup>	<b>9.6</b>	
K	Total Package Input Power at Rated Capacity and Full Load Operating Pressure <sup>d</sup>	<b>47.2</b>	kW <sup>d</sup>


Specific Package Input Power at Rated Capacity and Full Load Operating Pressure	<b>23.40</b>	kW/100 cfm
---	--------------	------------



Member	Input Power (kW)	Capacity (acfm)	Specific Power
	47.17	201.6	23.40
	41.53	185.1	22.43
	32.72	138.8	23.57
	26.76	115.7	23.14
	22.81	87.2	26.16

**NOTES:**

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex C; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity (Item G) and Electrical Consumption (Item K) were measured for this data sheet.
- c. Maximum pressure attainable at full flow, usually the unload pressure setting for load/no load control or the maximum pressure attainable before capacity control begins.
- d. Total package input power at other than reported operating points will vary with control strategy.
- e. Isentropic Efficiency = theoretical power required divided by real measurement performance at same flow and pressure
- f. Pressure Ratio = the ratio of discharge pressure to inlet pressure, as determined at full-load operating pressure

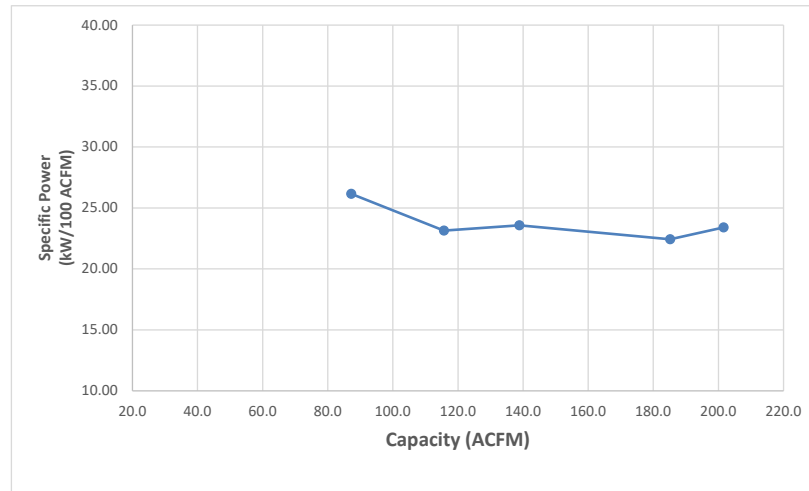

\* Tolerance is specified in ISO 1217, Annex C, as shown in table below:

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m <sup>3</sup> / min	ft <sup>3</sup> / min	%	%	
Below 0.5	Below 15	+/- 7	+/- 8	+/- 10%
0.5 to 1.5	15 to 50	+/- 6	+/- 7	
1.5 to 15	50 to 500	+/- 5	+/- 6	
Above 15	Above 500	+/- 4	+/- 5	